



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

PCT/IB03/05736

Bescheinigung

Certificate

Attestation

REC'D 26 JAN 2004

WIPO

PCT

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02293135.6

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr.:  
Application no.: 02293135.6  
Demande no:

Anmeldetag:  
Date of filing: 18.12.02.  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Storage unit comprising a main data carrier and a contact-less chip associated to  
said main data carrier, for use in a portable radio-communication device

In Anspruch genomene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G06K13/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SI SK

## DESCRIPTION

### Field of the invention

The invention deals with a portable radio-communication device designed for communicating with a contact-less chip associated to a main data carrier. It also deals with a storage unit comprising a main data carrier and a contact-less chip associated to that main data carrier. It also deals with a method of manufacturing such a storage unit. It also deals with a system comprising such a portable radio-communication device and such a storage unit.

The invention advantageously applies to storage on optical discs, more specifically storage on miniature optical discs to be played with portable electronic devices such as mobile phones, personal digital assistants, game stations...

### Background of the invention

The international patent application WO 02/17316 filed by Koninklijke Philips Electronics N.V. on February 28, 2002 describes a storage unit intended to be read by a player. This storage unit is made of a data carrier in which a contact-less integrated circuit (also referred to as chip) is embedded. The chip comprises receiving means for receiving a powering signal and transmitting means for transmitting a scrambling/de-scrambling key to be used for writing/reading data in said data carrier. The contact-less chip is powered optically by the player when the data carrier is in the player. In WO 02/17316, the chip is used to protect the data carrier against copy.

One of the objects of the present invention is to propose other applications for storage units that comprise a main data carrier and a chip associated to that main data carrier, the proposed applications being directed to a use of such storage units with portable radio-communication devices.

Another object of the present invention is to propose a portable radio-communication device specifically designed for implementing such applications.

Another object of the present invention is to propose another form of storage medium specifically suited for use in portable radio-communication devices.

Still another object of the invention is to propose a method for manufacturing such storage units.

### Summary of the invention

This is achieved with a storage unit as claimed in one of the claims 5 to 8, with a portable radio-communication device as claimed in one of the claims 1 to 4, with a manufacturing method as claimed in one of the claims 9 and 10, and with a system as claimed in claim 11.

According to the invention, the chip associated to the main data carrier is intended to be powered by a portable radio-communication device, and it is used for implementing at least one

of the following applications:

- a) transmitting to the portable radio-communication device data descriptive of the storage unit;
- b) transmitting a warning to the portable radio-communication device in response to a wanted notice;
- 5 c) storing specific data sent by the portable radio-communication device,
- d) on request, returning said specific data.

The portable radio-communication device comprises a reading and/or writing unit for reading and/or writing data in said main data carrier. In addition to that, it is specifically designed to power the contact-less chip, to send device data to the chip, to receive chip data  
10 from the chip, and to execute one of the following actions:

- a) displaying chip data sent by the chip;
- b) writing chip data sent by the chip in the main data carrier associated to the chip;
- c) authorizing/denying access to the main data carrier based on chip data sent by the chip.

In a first exemplary embodiment of the invention, when the storage unit is too small to carry information in a form that is directly readable by the user, advantageously:  
15 - the display of the portable radio-communication device is used to display data descriptive of the storage unit (for instance the title, the table of content,...);  
- and / or the portable radio-communication device is designed so as to send a wanted notice relating to a storage unit, and the storage unit is designed so as to send a warning when  
20 receiving a wanted notice directed to it (for instance the warning can be an illuminating and/or an acoustic signal).

In a second exemplary embodiment of the invention, the device data sent by the portable radio-communication device to be stored in the chip is a user-defined data, for instance a password and/or a parental control data, intended to be retrieved by the portable device in  
25 order to authorize/deny reading/writing in the main data carrier.

In a third exemplary embodiment of the invention, the chip is used as a buffer locked to the main data carrier, in which data intended to be stored in said main data carrier are stored (for instance because writing into the main data carrier is temporarily impossible due to bad mechanical conditions, insufficient power, or insufficient available memory space in the main  
30 data carrier).

When the main data carrier is too small to carry the chip, advantageously the storage unit comprises a caddy in which the main data carrier is packed and the chip is embedded. The term "caddy" includes items like cartridge or cassettes.

The portable radio-communication device comprises radio-communication means  
35 generating radio-communication signals for communication over a radio-communication network (for instance a GSM or a GPRS network).

Advantageously these radio-communication signals are used to generate the powering signal intended for powering the contact-less chip. This is achieved by providing the portable radio-communication device with:

- adaptation means for adapting the frequency of said radio-communication signal to an operation frequency of said contact-less chip, so as to generate said powering signal,
- demodulation means for demodulating said returned signal so as to retrieve said chip data,
- and optionally, modulation means for modulating said powering signal with data, called device data, so as to transmit said device data to said contact-less chip.

Avoiding the use of a complete contact-less reader for powering/communicating with the contact-less chip allows reducing the costs of such portable radio-communication devices.

#### Brief description of the drawings

- These and other aspects of the invention are further described with reference to the following drawings:
- figure 1 is a schematic representation of an example of storage unit according to the invention,
  - figure 2 is an explanatory diagram of a known powering / communicating mechanism used with contact-less radio frequency devices,
  - figure 3 is a schematic diagram of an example of portable radio-communication device according to the invention,
  - figures 4 to 7 are operation diagram of embodiments of a system according to the invention.

#### Description of preferred embodiments

Figure 1 is a representation of a non-limitative example of a storage unit according to the invention. The storage unit 1 comprises a caddy 2, a main data carrier 3 packed in the caddy 2, and a contact-less chip 4 embedded in the caddy 2. In this example the main data carrier is a miniature optical disc using blue laser technology (currently with this technology it is possible to store up to 1Gbyte on a disc having a 3cm diameter).

The contact-less chip 4 is a passive device operated by radio frequency coupling to a reader station. This means that the contact-less chip is only activated when it is in the response range of a reader station. Preferably the contact-less chip 4 is a microprocessor-based device.

Figure 2 is an explanatory diagram of a known powering/communicating mechanism used between a reader station 10 and a contact-less passive radio frequency device 11. The reader station 10 comprises a high frequency module 13 for transmitting/receiving high frequency signals and a coupling element represented by a first coil 14. The contact-less passive radio frequency device 11 comprises a coupling element represented by a second coil 20; a capacitor 21 connected in parallel with the second coil 20, a load 22 (for instance a resistor) also connected in parallel with the second coil 20, and an integrated circuit 23. The capacitance of the capacitor 21 is selected so that it combines with the inductance of the second coil 20 to form a parallel resonant circuit with a resonant frequency that corresponds with the transmission frequency of the reader station 10. The load 22 is controlled by the integrated circuit 23.

The first and the second coils can be seen as the components of a radio frequency transformer. The primary coil of the transformer is the coil 14 of the reader station 10. The

secondary coil of the transformer is the coil 20 of the contact-less device 11. And the space between the coils is the transformer's air core. When the contact-less device 11 is placed within the magnetic field generated by the reader station 10, by induction a flow of current is induced in the coil 20, thereby generating a signal used to power the integrated circuit 23.

5 Modulating the current as it passes through the first coil 14 allows data to be transmitted to the second coil 20. When powered, the integrated circuit 23 achieves demodulation so as to recover the transmitted data.

The energy that is drawn from the magnetic field by the contact-less device 11 can be measured at the reader station 10. Therefore changing the load 22 has the effect of a modulation. Data transfer from the contact-less device 11 to the reader station 10 is achieved by controlling the value of the load 22 depending on the data to be sent to the reader station 10 (this type of data transfer is known as load modulation).

10 According to the invention, the reader station is part of a portable radio-communication device, for instance a mobile phone. Portable radio-communication devices comprise radio-communication means generating radio-communication signals for communication over a radio-communication network (for instance a GSM or a GPRS network). Advantageously, instead of providing the portable radio-communication device with a complete reader station, powering and communicating with the contact-less chip is done by using the radio-communication means that are available in the portable radio-communication device.

15 An example of a portable radio-communication device according to the invention is described in figure 3. It comprises a central microprocessor unit 30, a radio-communication unit 31, a radio-communication antenna 32, a frequency multiplier 33, a modulation unit 34, a coupling device 35, a demodulation unit 36, a bus 37, a man-machine interface 38 and a reading/writing unit 39 for reading and/or writing data in a main data carrier. For instance, the man-machine interface 38 comprises a display, a speaker, a microphone, a keyboard... Elements that are not essential for the understanding of the present invention are omitted in this description.

20 The central microprocessor unit 30, the man-machine interface 38, and the reading/writing unit 39 are connected to the bus 37. The central microprocessor unit 30 sends radio-communication data D1 intended for transmission over a radio-communication network 40 to the radio-communication unit 31. The radio-communication unit 31 generates a radio-communication signal S1 carrying the radio-communication data D1. The radio-communication signal S1 is transmitted over the air via the antenna 32. Antenna 32 also allows receiving a radio-communication signal S2 via the radio-communication antenna 32. The received signal S2 is processed by the radio-communication unit 31 so as to recover radio-communication data D2 carried by the radio-communication signal S2. The recovered radio-communication data D2 are transmitted from the radio-communication unit to the central microprocessor unit 31. The central microprocessor unit 31 processes the recovered radio-communication data D2 for presentation to the user via the man-machine interface 38.

For instance, in the GSM radio-communication network, the radio-communication signal S1 generated by the radio-communication unit 31 is in the frequency range [890MHz-915MHz]. Known powering/communicating mechanism of the type described with reference to figure 2 operate in the ISM bands (Industrial Scientific Medical). Advantageously, the system of the invention operates in the 2,45MHz ISM band.

The frequency multiplier 33 is used to obtain a carrier S3 in the 2,45MHz ISM band from the radio-communication signal S1 delivered by the radio-communication unit 31. Then the modulation unit 34 modulates the carrier S3 with data D3 (called device data) delivered by the central microprocessor unit 30. For instance the modulation unit 34 is an amplitude modulation unit. The modulated signal S4, which carries the device data D3, is applied to the coupling device 35.

The coupling device 35 also allows receiving a modulated signal S5 generated by the contact-less chip 4. The received signal S5 carries chip data D4. It is forwarded to the demodulation unit 36 that is responsible for recovering the chip data D4. The recovered chip data D3 are forwarded to the central microprocessor unit 31.

It is to be noted that the modulation unit 34 is optional. For applications in which no device data have to be transmitted to the contact-less chip, the modulation unit 34 can be omitted.

As far as the communication with the contact-less chip 4 is involved, the microprocessor unit 30 is responsible for controlling the execution of at least one of the following actions:

- displaying chip data D4 sent by the chip;
- writing chip data D4 sent by the chip in the main data carrier associated to the chip;
- authorizing/denying access to the main data carrier based on chip data D4 sent by the chip;
- transmitting device data D3 relating to a request for storing specific data in said chip,
- transmitting device data D3 relating to a request for retrieving specific data stored in said chip.

Examples of operation of a system according to the invention will now be described with reference to figures 4 to 7.

In a first embodiment represented in figure 4, the portable radio-communication device 50 has a display 51 used to display data descriptive of the storage unit 1. Data descriptive of the storage unit 1 can be a title, a table of content... When the storage unit 1 is in the range of the portable radio-communication device 50 (step K11), it receives a powering signal PW. In this first embodiment, the chip 4 is programmed so as to return data DD that are descriptive of the storage unit 1 upon reception of the powering signal (step K12). And the portable radio-communication device 50 is programmed so as to display the received chip data. In this first embodiment, the storage unit can be either inside or outside the portable radio-communication device. When the storage unit is inside the portable radio-communication device, an advantage of recovering the data descriptive of the storage unit from the chip 4 rather than from the main data carrier 3 is that it requires less energy; and energy savings are important for portable devices.

For instance the data DD are stored in the chip 4 during the manufacturing process. The DD data can also be stored in the chip later on, for instance by a specific programming device available at a programming shop.

In a second embodiment represented in figure 5, the user of the portable radio-communication device, who is in the vicinity of a collection of storage units, can input or select via the man-machine interface an Identifier ID of a storage unit that he wants to find (step K21). The portable radio-communication device is programmed so as to send a wanted notice NW(ID) for that specific storage unit (step K22). The chips are programmed so as to send a warning WG when receiving a wanted notice directed to them (steps K23 and K24). For instance the warning can be an illuminating and/or an acoustic signal. In addition to such a warning, the chip may also send data DD descriptive of the wanted storage unit (step K25) for display by the portable radio-communication device (step K26).

In a third embodiment represented in figure 6, the portable radio-communication device is programmed so as to allow the user inputting user-defined data UD via the man-machine interface of the device (step K31) when the storage unit is in the device. After input by the user, a request R(UD) for storing the user-defined data is sent to the chip (step K32). Upon reception of such a request, the user-defined data are stored in the chip 4 (step K33). The portable radio-communication device is also programmed for sending a request R'(UD) for retrieving user-defined data UD previously stored in the chip 4 (step K34). Upon reception of such a request, the chip 4 returns the user-defined data UD (step K35). For instance the user-defined data are a password and/or a parental control data, intended to be retrieved by the portable device in order to authorize/deny reading/writing in the main data carrier (steps K36 and K37).

In a fourth embodiment represented in figure 7, the portable radio-communication device is programmed so that upon failure of an attempt to write main data MD in the main data carrier (step K41), a request R(MD) for storing the main data is sent to the chip 4 (step K42). Upon reception of such a request, the main data are stored in the chip 4 (step K43). The portable radio-communication device is also programmed for sending request R'(MD) for retrieving main data previously stored in the chip 4 (step K44). Upon reception of such a request, the chip 4 returns the main data (step K45) and the main data are written in the main data carrier (step K46). This embodiment is advantageously used when the failure of the attempt to write in the main data carrier was due to temporarily reasons (for instance to bad technical conditions, insufficient power, or insufficient available memory space in the main data carrier).

Advantageously, the storage unit 1 is manufactured according to a manufacturing method that comprises the following steps:

- providing main data on a main data carrier,
- providing at least program instructions on a contact-less chip that comprises receiving means for receiving a powering signal carrying data, processing means, memory means, and transmitting means for transmitting a signal carrying data,



- embedding said contact-less chip in a caddy,
- packaging said main data carrier in said caddy,

said program instructions being intended for the execution of at least one of the following actions when executed by said processing means:

- 5 a) upon reception of a powering signal that carries a request for storing specific data in said chip, storing said specific data in said memory means,
- b) upon reception of a powering signal that carries a request for retrieving specific data stored in said memory means, returning a signal carrying said specific data.

Advantageously, at least part of the main data are provided on the contact-less chip (for  
10 instance descriptive data).

The main data can be of any nature, for instance it can comprise audio, video, games, maps...

With respect to the described portable radio-communication device, storage unit and manufacturing method, modifications or improvements may be proposed without departing from  
15 the scope of the invention. The invention is thus not limited to the examples provided.

In particular other powering/communicating mechanisms can be used (for instance the transmission from the portable device to the contact-less chip can be done optically when the storage unit is inside the phone).

The reading and/or writing unit described above can be omitted from the portable radio-communication device for instance when the only contemplated applications relate to the display  
20 of chip data on the display of the portable radio-communication device.

The word "comprising" does not exclude the presence of other elements or steps than those listed in the claims.

## CLAIMS

1. A portable radio-communication device comprising at least:
  - a display for displaying data,
  - a radio transmission/reception unit for transmitting a powering signal to a contact-less chip associated to a main data carrier and for receiving a signal returned by said chip, said returned
  - 5 signal carrying chip data relating to said main data carrier,
  - a reading and/or writing unit for reading and/or writing data in said main data carrier,
  - and processing means for processing said chip data so as to execute at least one of the following actions:
    - a) displaying chip data,
    - 10 b) writing chip data in said main data carrier,
    - c) checking chip data to authorize/deny reading/writing in said main data carrier.
  
2. A portable radio-communication device as claimed in claim 1, intended for generating a radio-communication signal for communication over a radio-communication network, wherein
- 15 said radio transmission/reception unit comprises:
  - adaptation means for adapting the frequency of said radio-communication signal to an operation frequency of said contact-less chip, so as to generate said powering signal,
  - demodulation means for demodulating said returned signal so as to retrieve said chip data.
  
- 20 3. A portable radio-communication device as claimed in one of claims 1 or 2, further comprising modulation means for modulating said powering signal with data, called device data, so as to transmit said device data to said contact-less chip.
  
4. A portable radio-communication device as claimed in claim 3, designed so as to:
  - 25 - transmit device data relating to a request for storing specific data in said chip,
  - transmit device data relating to a request for retrieving specific data stored in said chip.
  
5. A storage unit comprising a main data carrier and a contact-less chip associated to said main data carrier, said contact-less chip comprising:
  - 30 - receiving means for receiving a powering signal sent by a portable radio-communication device,
  - processing means, memory means and transmitting means for executing at least one of the following actions:
    - a) returning chip data stored in said memory means and descriptive of said storage unit upon
    - 35 ~~reception~~ of a powering signal;
    - b) when said powering signal carries device data relating to a storage unit wanted notice, checking whether the storage unit is the wanted storage unit and transmitting a warning to said

portable radio-communication device when said storage unit is the wanted storage unit;

c) when said powering signal carries device data relating to a request for storing specific data in said chip, storing said specific data in said memory means,

d) when said powering signal carries device data relating to a request for retrieving specific data stored in said memory means, transmitting said specific data.

6. A storage unit as claimed in claim 5, wherein said portable radio-communication device comprising a reading/writing unit for reading/writing data in said main data carrier when said main data carrier is inserted in said portable radio-communication device, said specific data is a user-defined data input by a user via said portable radio-communication device, said user-defined data being intended to be used by said portable radio-communication device to authorize reading/writing in said main data carrier.

7. A storage unit as claimed in claim 5, wherein said portable radio-communication device comprising a reading/writing unit for reading/writing data in said main data carrier when said main data carrier is inserted in said portable radio-communication device, said specific data is main data intended to be written in said main data carrier.

8. A storage unit as claimed in claim 5, comprising a caddy in which said main data carrier is packed and said contact-less chip is embedded.

9. A method of manufacturing a storage unit, said method comprising:

- providing main data on a main data carrier,
- providing at least program instructions on a contact-less chip that comprises receiving means for receiving a powering signal carrying data, processing means, memory means, and transmitting means for transmitting a signal carrying data,
- embedding said contact-less chip in a caddy,
- packaging said main data carrier in said caddy,

said program instructions being intended for the execution of at least one of the following actions when executed by said processing means:

- a) upon reception of a powering signal that carries a request for storing specific data in said chip, storing said specific data in said memory means,
- b) upon reception of a powering signal that carries a request for retrieving specific data stored in said memory means, returning a signal carrying said specific data.

10. A method of manufacturing a storage unit, said method comprising:

- providing main data on a main data carrier,
- providing at least part of said main data, that is descriptive of said storage unit, and program instructions on a contact-less chip that comprises receiving means for receiving a powering

signal, processing means, memory means, and transmitting means for transmitting a signal carrying data,

- embedding said contact-less chip in a caddy
- packaging said main data carrier in said caddy,

5 said program instructions being intended for the execution of at least one of the following actions when executed by said processing means:

a) upon reception of a powering signal, returning data stored in said memory means and descriptive of said storage unit,

10 b) upon reception of a powering signal that carries a wanted notice relating to a wanted storage unit, checking whether the storage unit is the wanted storage unit and, in such a case, transmitting a warning.

11. A system comprising a portable radio-communication device as claimed in claim 1 and a storage unit as claimed in claim 5.

**ABSTRACT****STORAGE UNIT COMPRISING A MAIN DATA CARRIER AND A CONTACT-LESS CHIP  
ASSOCIATED TO SAID MAIN DATA CARRIER, FOR USE IN A PORTABLE RADIO-  
COMMUNICATION DEVICE**

The invention proposes applications for storage units that comprise a main data carrier and a chip associated to that main data carrier, the proposed applications being directed to a use of such storage units with portable radio-communication devices.

The proposed applications are:

- 5 a) transmitting to the portable radio-communication device data descriptive of the storage unit;
- b) transmitting a warning to the portable radio-communication device in response to a storage unit wanted notice;
- c) storing specific data sent by the portable radio-communication device,
- d) on request, returning said specific data.

- 10 The invention also proposes a portable radio-communication device specifically designed for implementing such applications. Advantageously the radio-communication means of the portable device are used to generate a signal for powering the contact-less chip.

Reference: figure 1

Application: storage units of small dimensions intended for use in portable devices.

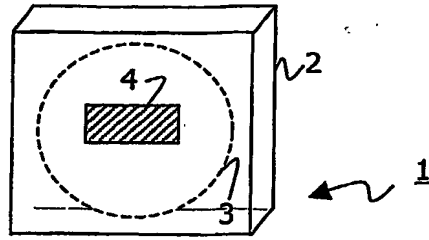


FIG. 1

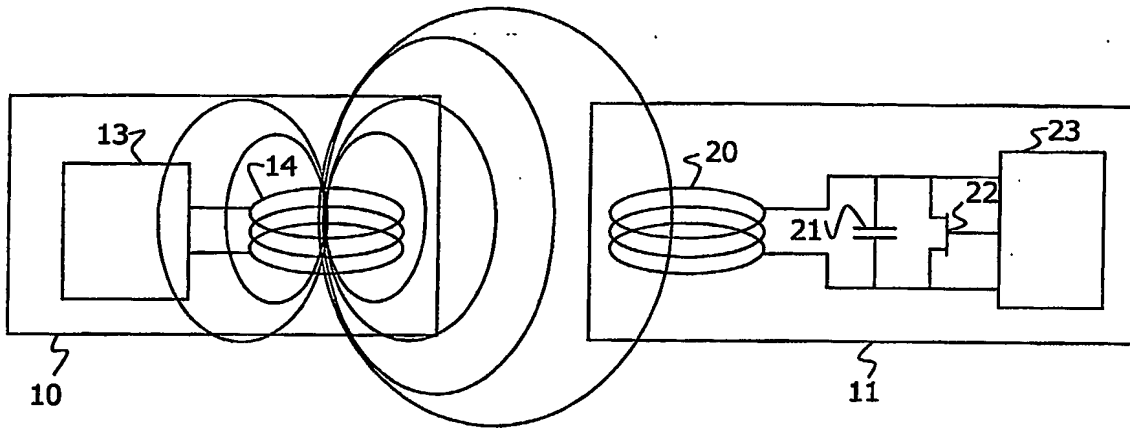


FIG. 2

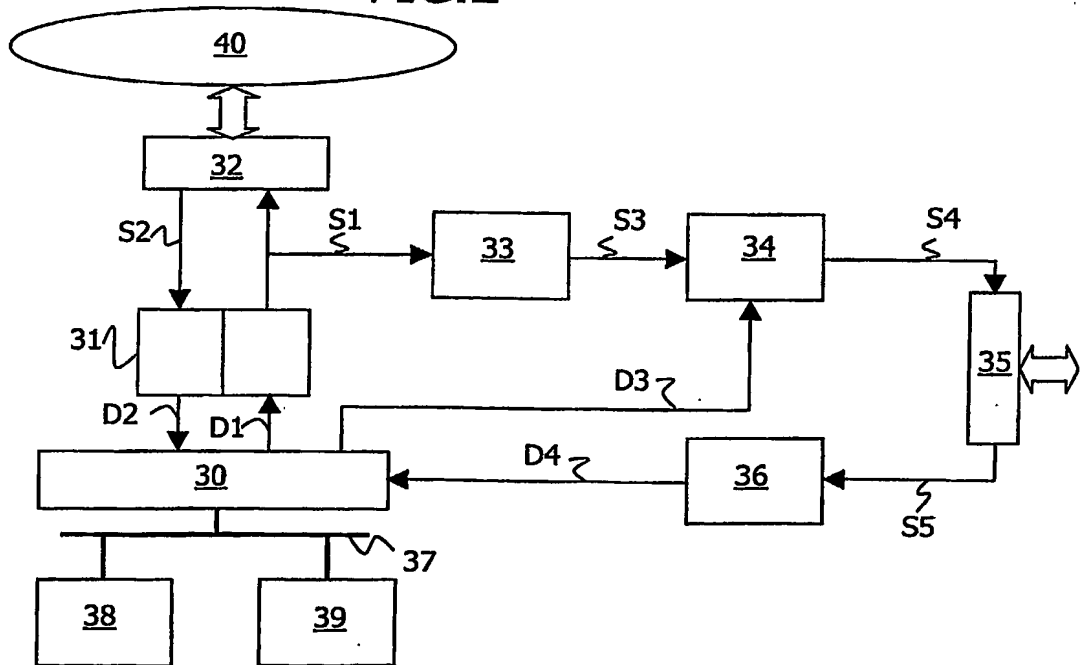
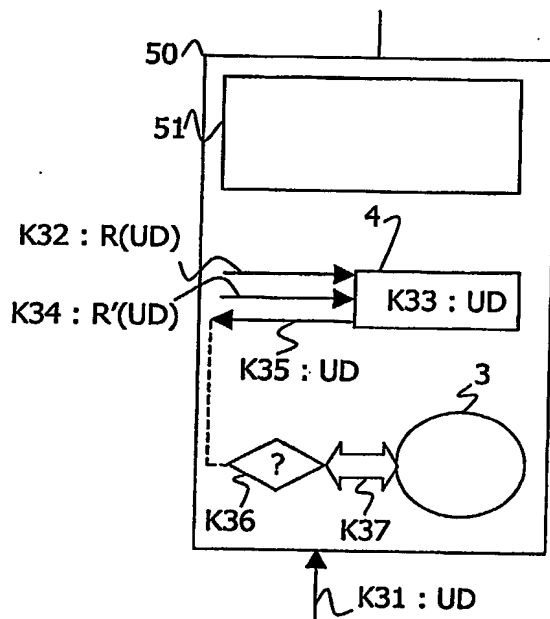
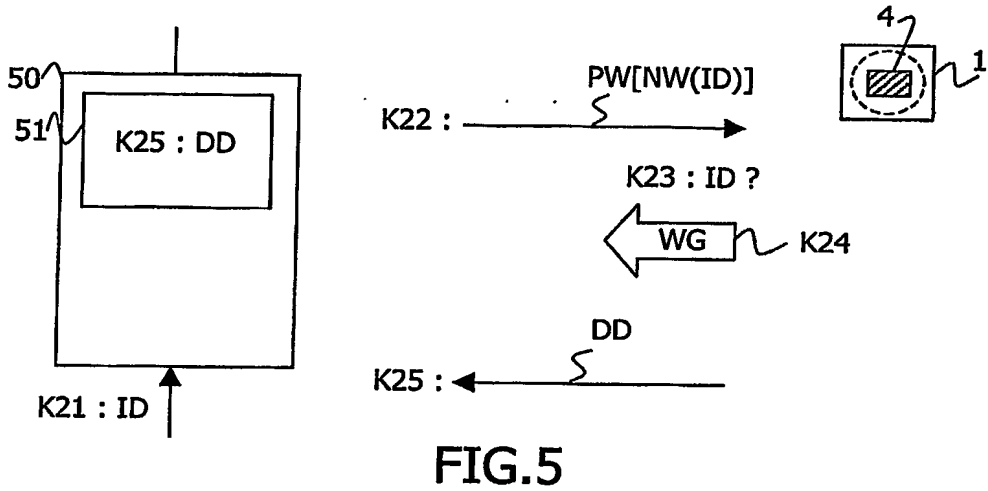
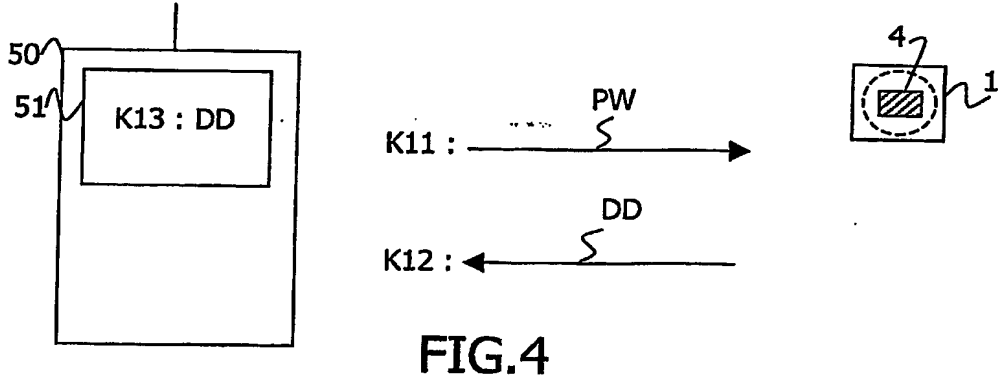


FIG. 3



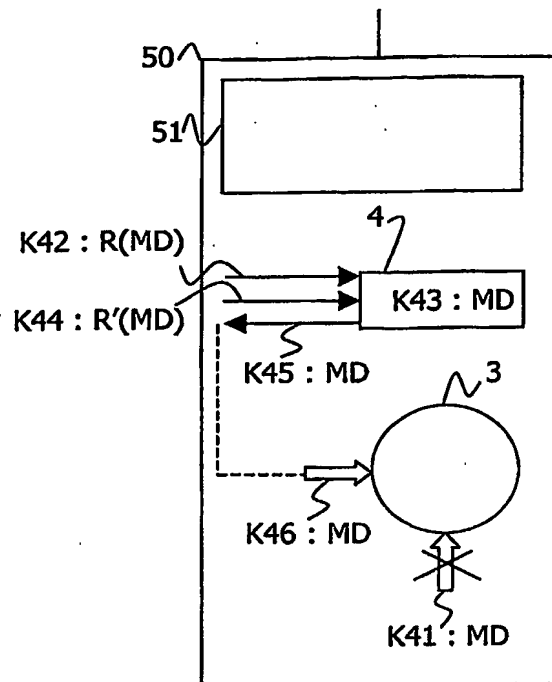


FIG.7



PCT Application  
**IB0305736**

